


Probe Description & Product Application	Mag-FLEX In-Tank Probes for Monitoring Gas, Diesel, & Alternative Fluids in both USTs and ASTs					
Specific Products Monitored / Product Compatibility	Part # & Description	Approved Products	Monitoring Functionality Options			
	1. 0889591-4xx Mag-FLEX probe with gasoline & water floats, wired, UL/cUL *	Gasohol (<=15% Ethanol)	No Leak Detection / Inventory Only			
	2. 0889591-5xx Mag-FLEX probe with diesel & water floats, wired, UL/cUL *	Gasoline with <=7% Methanol and 8% TBA				
	3. 0889591-6xx Mag-FLEX probe with no water float, wired, UL/cUL *	Gasoline with <=15% MTBE				
	4. 0889591-8xx Mag-FLEX probe for methanol tanks with no water float, wired, UL/cUL	Gasoline with <=17% TAME				
	5. 0889591-1xx Mag-FLEX probe with gasoline & water floats, wireless, UL/cUL	Leaded Gasoline				
	6. 0889591-2xx Mag-FLEX probe with diesel & water floats, wireless, UL/cUL	Mineral Spirits				
	7. 0889591-3xx Mag-FLEX probe with no water float, wireless, UL/cUL	Premium Unleaded Gasoline				
	8. 0889591-7xx Mag-FLEX probe for methanol tanks with no water float, wireless, UL/cUL	Regular Unleaded Gasoline				
	9. 0889561-4xx Mag-FLEX probe with gasoline & water floats, wired, ATEX	Gasoline with <=15% ETBE				
	10. 0889561-5xx Mag-FLEX probe with diesel & water floats, wired, ATEX	Gasoline with <=12% TBA				
	11. 0889561-6xx Mag-FLEX probe with no water float, wired, ATEX	Diesel (Fuel Oil #2) **				
	12. 0889561-8xx Mag-FLEX probe for methanol tanks with no water float, wired, ATEX	Kerosene (Fuel Oil #1) **				
	13. 0889561-1xx Mag-FLEX probe with gasoline & water floats, wireless, ATEX	Bio Diesel (Low Density) **				
	14. 0889561-2xx Mag-FLEX probe with diesel & water floats, wireless, ATEX	Methanol ***				
	15. 0889561-3xx Mag-FLEX probe with no water float, wireless, ATEX					
	16. 0889561-7xx Mag-FLEX probe for methanol tanks with no water float, wireless, ATEX					
	<i>* Only compatible with TLS4, TLS4B, and TLS-450PLUS consoles, software version 6.A or higher</i>					
<i>** Only compatible with the Diesel Float Kit</i>						
<i>*** Applicable to 0889591-8xx, 0889561-8xx, 0889591-7xx, and 0889561-7xx part numbers only</i>						
Console Compatibility	Maximum Probes / Console	Probe Interface Modules				
		Module Part #	Module Description	# of Modules per Console	# of Probe Inputs per Module	Availability
TLS-450PLUS (8600 Series) with TLS-XB installed (3 max per system)	64	0332812-001	Universal Sensor Module (USM) Interface for Probes, Sensors, and DPLLD	Up to 4	16	Sold Separately (either Factory Installed or as a Spare Module)
TLS4 (8601 Series)	12	No module required, probe input capability factory installed				
TLS4B (8601 Series)	6					
TLS-350/R/PLUS	16	0329356-002	4-Input Probe Interface Module	4	4	Sold Separately (either Factory Installed or as a Spare Module)
TLS-300i	4	No module required, probe input capability factory installed				
TLS-300C	2					

Float Installation Kits	Part # & Description	Float Size	Special Instructions	Min/Max Probe Length
	0330020-776 Kit – Low Level Water Float (1.9" for Gasoline)	4" (10.16cm)	Low level water float kits require a 4" tank opening and connect directly to the existing water float. Wall guide included.	5' (1.5m) - 72.1' (22m)
	0330020-777 Kit – Low Level Water Float (1.9" for Diesel)	4" (10.16cm)		
	0330020-824 Kit – Low Level Water Float (1.9" for Bio-Diesel)	4" (10.16cm)		
Other Installation Accessories	0848100-004 Over voltage protection device 1 per probe recommended 0576008-708 2" (5.08cm) NPT Adapter for installation of Mag-FLEX AST probes (req'd 1/probe)			
Specifications	Product	Water		
Measurement Accuracy	+/- 0.0800" (2.032mm)	+/- 0.12" (3.048mm)		
Resolution – One Sample Reading	+/- 0.02" (0.508mm)	+/- 0.02" (0.508mm)		
Minimum Measurement	+/- 7.3" (18.542cm) probe; 1.5" (3.81cm) float	+/- 5.5" (13.97cm) Std; 1.9" (4.826cm) low level		
Operating (Working) Temperature Range	-40°F to +140°F (-40°C to +60°C)			
Thermistors	5 Thermistors			
Product	Material			
Probe Canister	Stainless Steel 303			
Rigid Shaft Sections	Stainless Steel 304			
Corrugated Flexible Shaft & Floats	Stainless Steel 316 Ti			
Weight	Stainless Steel 303			
Magnet Casing	Conductive Plastic			
Third Party Evaluation / Agency Listings	http://www.nwglde.org/evals/veeder_root_j.html			
Product Installation Guide	https://www.veeder.com/us/technical-document-library			

Example Installation

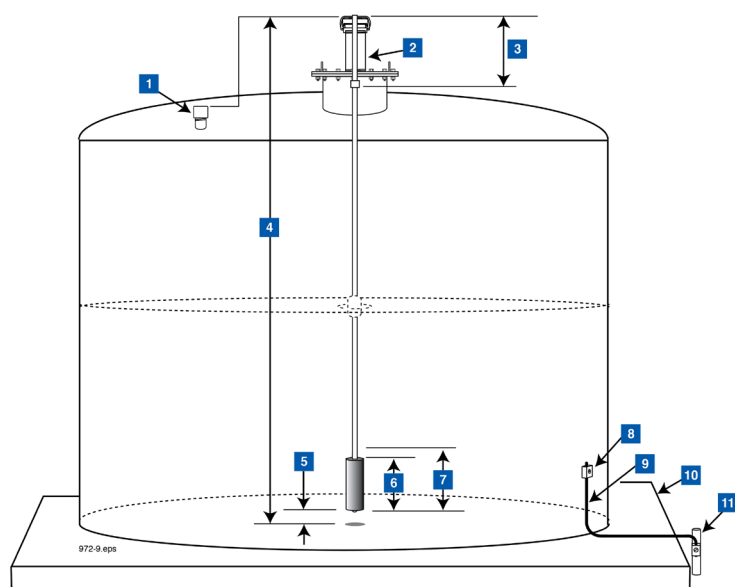

1. Insertion measuring point for 2" (5.08cm) pipe cap installations (top of pipe cap to tank bottom)
2. Insertion measuring point for 4" (10.16cm) riser pipe installations (top of riser pipe to tank bottom). Add 2" (5.08cm) for brass ring/and riser cap.
3. Null zone - typical all probes
4. Measured insertion length (always order smaller probe if measured insertion length falls between two probes in table)
5. Clearance off bottom
6. Weight length
7. Dead zone
8. Tank grounding bracket
9. Grounding cable
10. Concrete tank pad
11. Earth grounded electrode with cable bracket